


Webasto Pure

11 kW

Productversion II



Product image may differ from original.

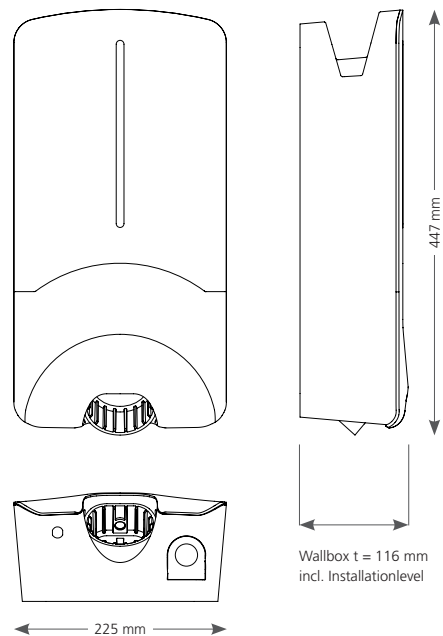

The Webasto Pure at a glance:

- **NEW** 5 years safety and quality guaranteed:
In addition to the 2-year statutory warranty, we give a further 3-year Webasto guarantee for free
- **NEW** Cost savings for installation thanks to integrated DC residual current protection
- **NEW** Remote access by the grid operator to ensure grid stability
- Configurable charging capacity at various levels up to 11 kW
- Integrated type 2 charging cable with 4.5 m or 7 m cable length
- Convenient cable suspension and plug socket
- Charging station operating status display in optimized LED design
- Access control with universal key switch
- Easy-to-use charging station (plug & play)
- Easy installation and fast start-up
- Made in Germany for high-quality manufacturing

Technical specifications:

| | Webasto Pure 11 kW (Version II) |
|---|--|
| Electrical characteristics | |
| Nominal current (A) | 8, 10, 13, 16 Splitphase (L1+L2, without N) single phase, 2-phase or 3-phase |
| Line voltage (V AC) | 230 / 400 (Europe) |
| Line frequency (Hz) | 50 |
| Network forms | TT / TN (single- and 3-phase) / IT (single-phase) |
| EMC class | Interference emission: Class B (residential, business, commercial areas) Interference resistance: residential, business, commercial areas |
| Overvoltage category | III as per EN 60664 |
| Protection class | I |
| Necessary protective equipment | Residual current circuit breaker RCD type A and miniature circuit breakers must be provided on the installation side |
| Integrated protective equipment | ≥6mA DC residual current detection |
| Connections | |
| Mounting | Wall or stand mounting (permanently connected) |
| Cable feed | Mounted on-wall or in-wall |
| Connection cross-section (wire dimension) | Cross-section of the connecting cable (Cu) taking into account the local conditions and norms 6 mm ² (for 16 A) |
| Charging cable with charging coupling | Type 2 cable according to EN 62196-1 and EN 62196-2; length: 4.5 m or 7 m, cable bracket integrated |
| Output voltage (V AC) | 230 / 400 |
| Max. Charging power (kW) | 11 |
| Feature | |
| Locking mechanism | Universal key switch |
| Display | LED light bar (RGB), buzzer |
| External control interface | Potential-free contact |
| Mechanical data | |
| Dimensions (W x H x D) (mm) | 225 x 447 x 116 |
| Weight (kg) | 4,5 m cable length: 4,6 7 m cable length: 5,3 |
| IP protection class, device | IP54 |
| Protection against mechanical impact | IK08 |
| Ambient conditions | |
| Operating temperature range (°C) | -30 to +55 (without direct solar radiation) |
| Storage temperature range (°C) | -30 to +80 |
| Permissible relative humidity (%) | 5 to 95 non-condensing |
| Altitude (m) | Max. 3,000 above sea level |
| Certification | |
| Other standards and guidelines | – CE conformity – 2014 / 53 / EU Radio Equipment Directive – 2014 / 30 / EU EMV conformity – 2011 / 65 / EU RoHS Directive – 2001 / 95 / EC General Product Safety – 2012 / 19 / EU Waste Electrical and Electronic Equipment Directive – 1907 / 2006 REACH Regulation |